

Freestanding Model 1

Product Description

A small form factor 5 stage reverse osmosis water purifier that can provide hot or cold water in spaces of 25 people or less.

Product Specifications

Water	Hot and Cold
Filter Stages	Sediment, Pre-Carbon, RO, VOC Carbon, UV
Finish	Vacuum Formed Plastic and Coated Steel
Power	120 VAC 60hz
Activation by	Button Press
Mounting Type	Free Standing
Chilling Capacity*	5 GPH
Cooling Power	100W
Heating Power	1000W
Dimensions (L x W x H)	15" X 12" X 48"
Approx. Shipping Weight	45 lbs
Installation Location	Indoor only
No. of People Served	25 or fewer
Water Dispense Rate	0.8 GPM

*Chilling Capacity is based on ASHRAE 18 Testing conditions with 80°F inlet water and 90°F Ambient temperature.

OPTIONAL EARTHQUAKE BRACKET

Complies with ADA 308.2 accessibility requirements when installed according to the requirements outlined in these standards. Installation Instructions (PDF)

Product Certified to Below Standards

NSF/ANSI 42, 53, 58, 401, P472, 61 (Q₁), & 372 (lead free) by IAPMO R&T

UL 399 by SGS China



PART: _____ QTY: _____

PROJECT: _____

CONTACT: _____


DATE: _____

NOTES: _____

APPROVAL: _____

Freestanding Model 1

Installation and Placement Drawings for the AquaTru Freestanding Model 1

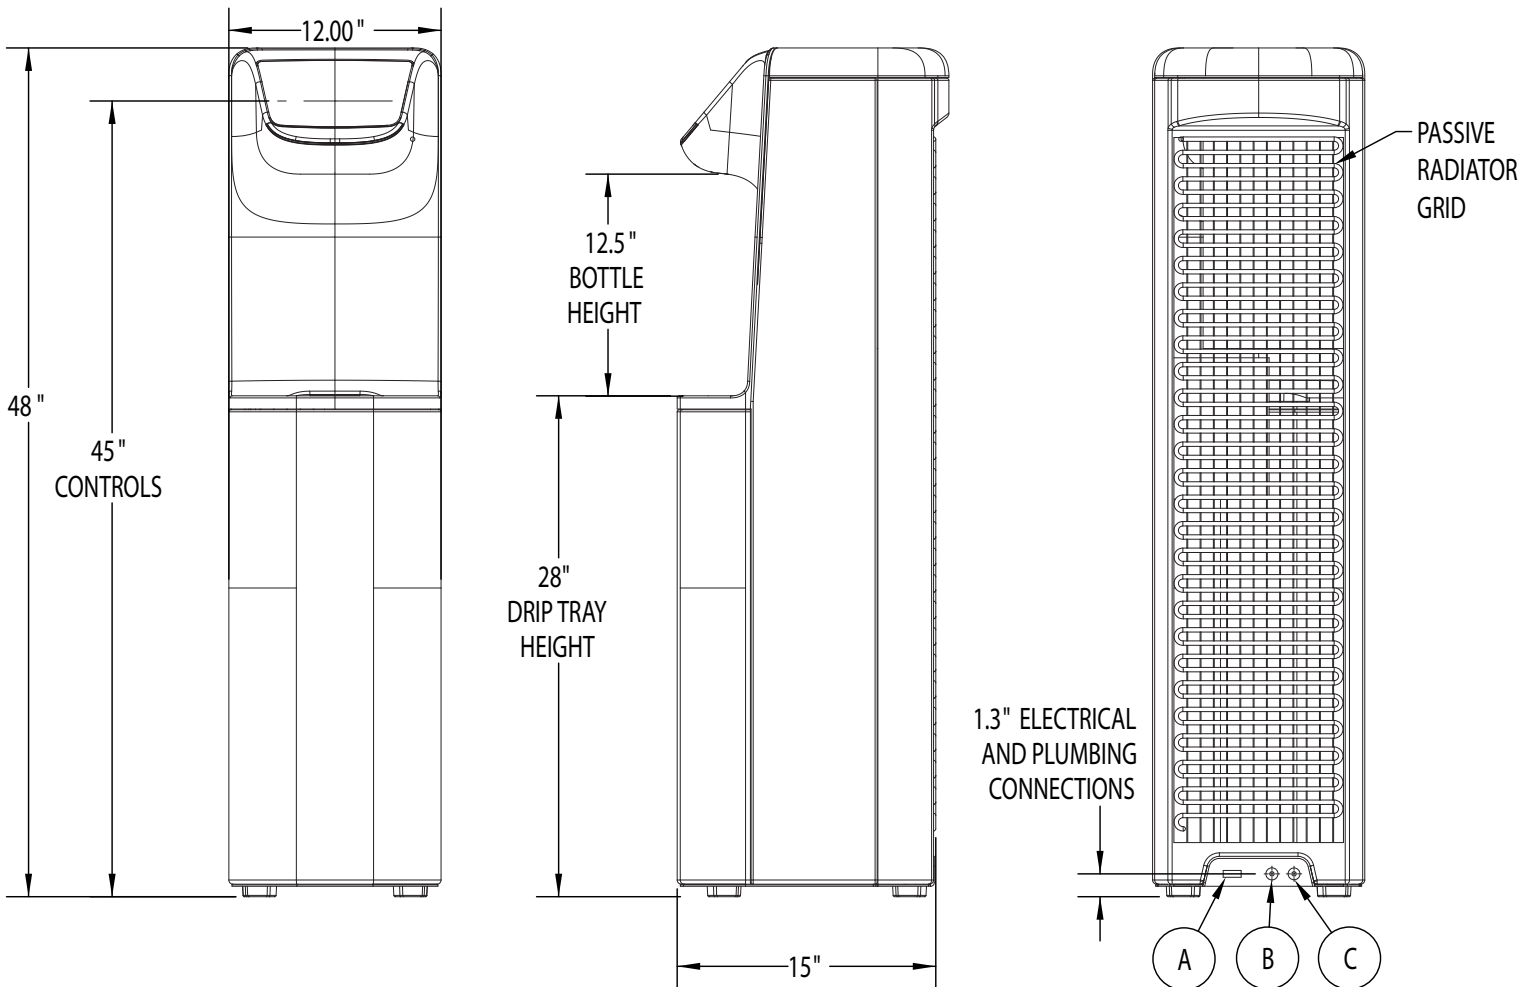

LEAVE AN ADDITIONAL 2" OF SPACE BEHIND THE UNIT FOR AIR FLOW AND ELECTRICAL AND PLUMBING CONNECTIONS

ALL PLUMBING CONNECTIONS ARE 1/4" QUICK CONNECT TYPE FITTINGS

- A. GROUNDED 120V 60HZ POWER
- B. WATER INLET (PLUMBED INTO MAIN)
- C. RO WASTE DRAIN LINE (MUST BE PLUMBED INTO MUNICIPAL SEWER)